



Afficheur client*




Lecteur carte magnétique*



Ecran pivotant



Imprimante Thermique intégrée

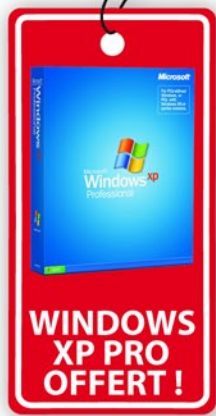

WINDOWS XP PRO OFFERT !

		iFLEX
Chipset		Intel 945GME
CPU		Intel Celeron-M 1.5 GHz
HDD		SATA 2.5" 120 Go
Memory		DDR2 SODIMM x 2 slot 1024 Mo
VGA		Intel 82915 GMCH
Display		15" TFT LCD 1024 x 768 with 5 wired resistive Touch Screen
Internal I/O	USB	3 Ports (reserved for Touch controller, SCR EMV card, Camera)
	PS/2	1 Keyboard reserved for MSR controller
	RS-232	COM 4 reserved for VFD, COM 5 & 6 with 9pin header
	D-SUB	Reserved for 2nd display
	Extension	MINI PCI
External I/O	LVDS	Main display use
	Parallel	1 Port
	USB	Rear 2, Side 2
	PS/2	Mouse 1 / Keyboard 1
	RS-232	COM 1~2 with +5/12 V power on 9pin
	LAN	GbE LAN
	Audio	1, Line-out / Line-in / Mic
Options	MSR	Comply with ISO 7811, Support 1 & 2, 2 & 3 or 1 & 2 & 3 track
	SCR	EMV level
	Camera	Camera
	Dallas	Dallas I-button reader
	VFD	VFD type customer display (20 x 2)
	2nd LCD	12" LCD : 800 x 600 resolution
	DVR	-
	Wifi/Bluetooth	USB Adapter
	VGA	Mini PCI for VGA card
	Safety & EMI	CE, FCC, MIC
Power Supply	AC 110 or 220V (Max. 230 watt)	
OS Support	Windows 2000/XP/XPE, WEPOS, POS Ready, Linux	

NOUVEAU PRODUIT TOUT EN UN !